


SF 920

UHV Pre-Assembled sensor and feedthrough combinations

Features

- > Bakeable to 300 degrees C
- > Length - 100mm to 500mm - please specify when ordering
- > Rigid 3/16" Dia Coax connector tube

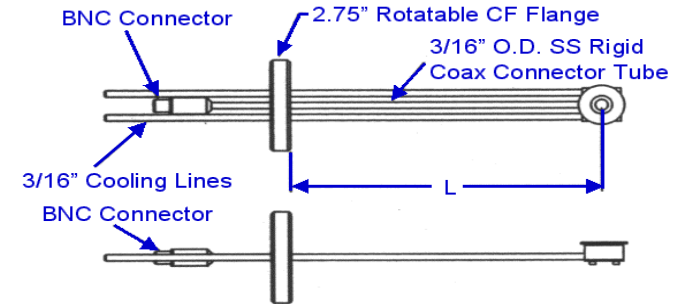

ORDERING INFORMATION

Sensor Description	No of Tubes	Tube Dia	Microdot	BNC	Mech Connect	Weld Connect	Feedthrough Description	
							2 3/4" Conflat Flange	
							Part Numbers & Price	
Single	3	3/16"		1		Y	920-001	£850
Single/Rt Angled	3	3/16"		1		Y	920-002	£850
Single Shuttered	3	3/16"		1		Y	920-003	£1,490
Dual Shuttered	4	3/16"		2		Y	920-005	£2,240
Dual Rt Ang Shuttered	4	3/16"		2		Y	920-007	£2,240

Date: 6-May-09

Notes: Our line of Sensor and feedthrough combinations are welded to the customer specified length and bend configuration. All assemblies are supplied with the internal coax cable attached and housed in a rigid 3/16" tube. Each assembly is bakeable to 300 degrees C and helium mass spectrometer leak tested prior to shipment.

All prices given above are excluding Postage & Packing and excluding VAT or other duties that may be applicable.

Please contact the sales team at Intellevation for assistance.

sales@intellevation.co.uk